

# HR200V Ducted MVHR Unit



## Features and Benefits

- Powered heat recovery module for smaller commercial applications.
- Up to 70% heat recovery.
- With 150mm duct connection.
- Extremely quiet on low speeds.
- Low power consumption.
- Washable heat exchanger.
- Pre-wired to a flexible cable.
- DEMKO Approved.

A ducted heat recovery unit for internal rooms. Self-contained and includes two mixed flow speed controllable fans. Using a high performance, polymeric heat exchange cube together with two power fans, the HR200V can boast a temperature efficiency of up to 70%. Low speed for trickle ventilation mode.

Specially designed to provide ventilation for small internal rooms in commercial, educational and leisure applications. Ventilation is achieved by using nominal 150mm diameter flexible ducting. The unit is completely self contained and includes two mixed flow speed controllable fans plus a high efficiency polymeric heat exchanger.



## Models

Model	Stock Ref	£ Trade
HR200V	14120010	394.32


Controller	Stock Ref	£ Trade
150VA	563538	72.63

## Dimensions (mm)

Weight: 10.40kg

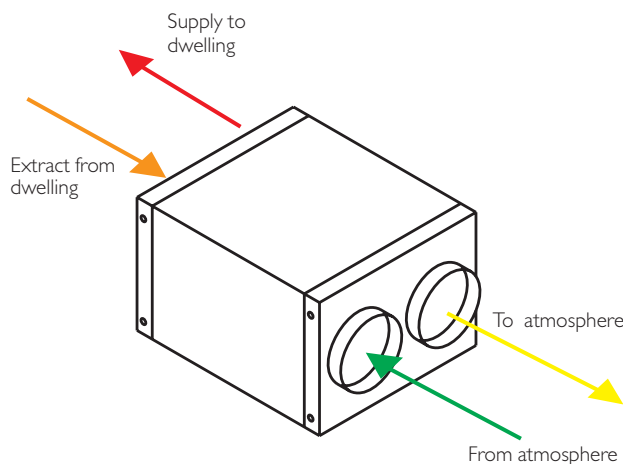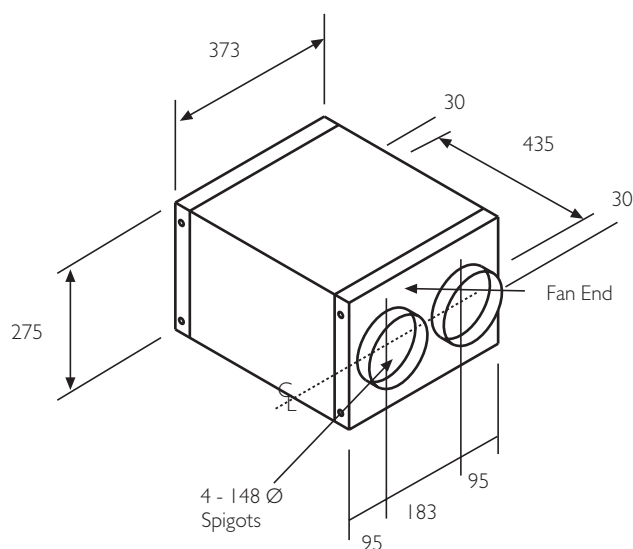

## Performance

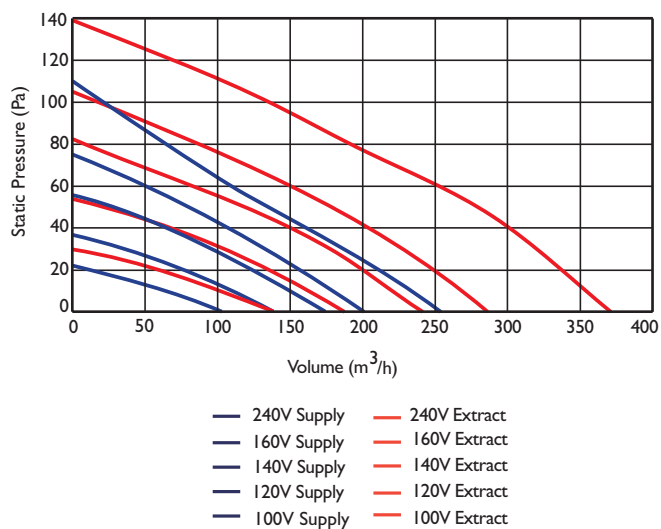

HR200V to be used with a 150VA Transformer for maximum controllability

Motor Speed	1	2	3	4	5
Voltage	100	120	140	160	240
Watts	30.0	40.0	51.5	60.0	110.0
Volume m³/h (FID)					
Supply	102	138	174	201	253
Extract	139	187	241	286	371